

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

1442.1007

First Named Inventor or Application Identifier:

Tatsuya FUJIKI et al.

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

**Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 30]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 7]
4. ☒ Oath or Declaration [Total Pages: 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: / **18. CORRESPONDENCE ADDRESS**

STAAS & HALSEY LLP
Attn: H. J. Staas
700 Eleventh Street, N.W., Suite 500
Washington, DC 20001

Telephone: (202) 434-1500
Facsimile: (202) 434-1501

FUNCTION EXPANDING DEVICE FOR ELECTRONIC HARDWARE

BACKGROUND OF THE INVENTION

5 The present invention relates to attachments that are connectable to electronic hardware, such as a notebook personal computer ("PC") and expands their functions.

 The recent development and spread of notebook PCs have been increasingly demanding a notebook PC that is light for portability purposes and multifunctional on a desk. The PC body itself is thus made light, whereas various expansion or
10 extension units, such as a CD-ROM drive and a floppy disc drive, connectable to or built it have been proposed.

 However, the conventional expanding units, such as a CD-ROM drive, if built in the computer body would bulk up the body and deteriorate its portability. Those drives which are different in specification, such as a CD-ROM drive and a high density
15 floppy disc (LS-120), use different connectors for connection with the PC body. An attempt to expand a notebook PC with multiple functions (or specifications) would thus need a plurality of connectors accordingly, which prevents a realization of a miniature PC body. In other words, a conventional notebook PC cannot include multiple connectors in order to realize the miniaturization, and thus it cannot become
20 multifunctional. Moreover, as a CPU in the PC body controls a CD-ROM drive (or a music compact disc ("CD") drive), listening to a music CD arduously needs run application software that is installed in the PC body. This operation handles time-consuming and not easy.

 Accordingly, the assignee filed Japanese Patent Application No. 10-260602
25 entitled "function expanding device, component unit, and electronic hardware" on September 14, 1998. FIG. 9 shows notebook PC related attachment group 250 and

notebook PC 240.

The notebook PC related attachment group 250 includes bay housing 270, floppy disc drive ("FDD") 110, CD-ROM drive 130, magneto-optical ("MO") disc drive 140, high density floppy disc 150, digital video disk ("DVD") drive 160, hard disc drive ("HDD") 170, AC/DC adapter 180, and battery pack 190. The FDD 110, CD-ROM drive 130, MO disc drive 140, high density floppy disc drive 150, DVD drive 160, and HDD 170 each constitute an expanding unit.

Function expanding unit 260 for a notebook PC is made by attaching the battery pack 190 to the bay housing 270 and inserting one of the FDD 110, CD-ROM drive 130, MO disc drive 140, high density floppy disc drive 150, DVD drive 160, HDD 170 and AC/DC adapter 180. There are eight modes and its extensibility is wider than the conventional. This notebook-PC function expanding unit 260 is attached to the bottom of the notebook PC 240. The notebook-PC function expanding unit 260 serves as a charger for the battery pack 190, and as a rack for the notebook PC 240. When the notebook-PC function expanding unit 260 is attached to the notebook PC 240, the notebook PC 240 and the notebook-PC function expanding unit 260 are electrically connected to each other, expanding a function of the notebook PC 240.

The bay housing 270 has bay 273 as a storage part. The bay 273 is a flat space corresponding to an outer shape of the FDD 110, etc., and has an opening into which the FDD 110 or the like is inserted.

As shown in FIG. 9, the above devices 110, 130, 140, 150, 160, 170 and AC/DC adapter 180 have approximately similar flat outer shape that may be inserted into and corresponds to the bay 273 in the bay housing 270, and include connectors 111, 131, 141, 151, 161, 171, and 181 at the same top position in the insertion direction.

As shown in FIG. 9, the floppy disc drive 110 has an outer shape that may be

inserted into and corresponds to the bay 273, and includes connector 111 at the top in the insertion direction.

The connectors 111, 131, 141, 151, 161, 171, and 181 at the side of each expanding unit are connected to connector 295 (not shown) in the bay housing 270.

5 The connector 295 in the bay housing 270 is connected to a connector (not shown) at the bottom of the notebook PC 240. In this way, the bay housing 270 enables various expanding units to be connected to the notebook PC 240 while making light the body of the notebook PC 240 and reducing the number of connectors in the notebook PC.

The computer body 240 controls the FDD 110, CD-ROM drive 130, MO disc
10 drive 140, high density floppy disc drive 150, DVD drive 160, HDD 170, etc. Control by the CPU in the PC body over the CD-ROM drive (or CD drive) etc., needs arduously run application software installed in the PC body even in an attempt to listen to a music CD. This operation handles time-consuming and not easy. More specifically, where the computer body 240 operates the expanding unit, a user may feel
15 that running of the PC and control over fast-forwarding and positioning at the head of a desired tune using PC's application software interface are harder than operations of the ordinary audio equipment. General CD performance software for PCs indicates on a PC display the way of operations for an operation part on a CD player and requires a user to input a desired performance button etc. on the indicated operational part by
20 using a pointing device, such as a mouse. This CD performance means has a disadvantage in that a user should await a period of time for PC and software activations. A tune designation in a CD needs an interface using a mouse or other input means on the PC, and the way of operation becomes disadvantageously different between the PC and the ordinary audio equipment. This exemplifies a CD, but
25 similar disadvantages are seen for DVD drives and other peripherals.

In an attempt to connect a new expanding unit (for example, a supplemental

storage) to a computer body, the function expanding device (or the bay housing 270) should be altered accordingly.

Before another expanding unit having a different specification is connected to a computer body, a specification of the function expanding device and a specification
5 of a connection part (the connector 295 in FIG. 9) should be redesigned. In other words, the specification for the connector 295 in FIG. 9 is determined so as to correspond to the expanding units 110, 130, 140, 150, 160, 170 and 180. An addition of an expanding unit having a different specification would thus require a change of a specification for the connector 295. The conventional example in FIG. 9 connects the
10 connector 295 directly to the computer body 240 and integrate them as one member, but it is conceivable to connect them using a cable. In this case, an addition of an expanding unit having a different specification thus requires a change of cable's specification (such as the number of signal lines). These design and specification changes increase the number of development steps of the entire apparatus and thus the
15 development cost. Although new peripherals for PCs are more and more developed, a connection of these peripherals to the notebook PC 240 via the function expanding device (or bay housing 270) would increase the design and specification changes.

BRIEF SUMMARY OF THE INVENTION

20

Therefore, it is an exemplified general object of the present invention to provide a novel and useful function expanding device in which the above disadvantages are eliminated.

Another exemplified and more specific object of the present invention is to
25 provide a function expanding device that renders electronic hardware multifunctional, small, light, and easy to use.

In order to achieve the above objects, a function expanding device stated in claim 1 comprises a first connection part connectable to a unit which expands a function of electronic hardware, a second connection part connectable to the electronic hardware, and an operation part for the unit. This function expanding device enables
5 the unit to be operated not only by the electronic hardware but also by an operational part in the function expanding device.

The function expanding device stated in claim 2, depending upon claim 1, may further comprise a control part which may control the unit independent of the electronic hardware. For example, when the electronic hardware has a speaker and
10 the unit is a CD-ROM drive that may reproduce both a music CD and a CD-ROM, the control part of the function expanding device may control the reproduction of the music CD independent of the electronic hardware.

According to the function expanding device stated in claim 3 that depends upon claim 1, the operation part may power on at least part of the electronic hardware.
15 For example, when the electronic hardware has an amplifier that amplifies an audio signal in a music CD, the operation part may transmit the power-on signal to the amplifier. Thus, for example, even when the power-on signal is not supplied to the amplifier after the application in the electronic hardware runs, if power is supplied to the electronic hardware (by an AC adapter or a battery) the control part of the function
20 expanding device may control the amplifier in the electronic hardware

According to the function expanding device stated in claim 4 that depends upon claim 2, the control part may transmit operational information of the operation part to the electronic hardware. Thus, for example, the operational information of the operation part may reflect on and synchronize with application software in the
25 electronic hardware.

According to the function expanding device stated in claim 5 that depends

upon claim 1, the second connection part is connectable to a port replicater, and connectable to the electronic hardware via the port replicater. The second connection part may thus be connected indirectly to the electronic hardware.

According to the function expanding device stated in claim 6 that depends
5 upon claim 1, the second connection part may have a cable. Therefore, this electronic hardware may be made smaller than the electronic hardware that has an internal connector.

According to the function expanding device stated in claim 7 that depends
10 upon claim 1, the function expanding device may further comprise a display part which displays a status of the unit and enables a user of the function expanding device to confirm the operation. In particular, this function expanding device is suitable when only the control part of the function expanding device controls the unit without using the display part (for example, a LCD) in the electronic hardware.

According to the function expanding device stated in claim 8 that depends
15 upon claim 1, the unit is selected from a group including a music CD drive, a CD-ROM drive, a DVD-ROM drive, and an LS-120 drive, and the first connection part has a bay structure connectable compatibly to either drive in the group. Therefore, the electronic hardware need not conveniently have a connection part for each unit drive and may become multifunctional and miniature.

20 According to the function expanding device stated in claim 9 that depends upon claim 1, the second connector may have an IDE and music interfaces. Therefore, the electronic hardware may correspond to a unit pursuant to these interfaces and become multifunctional.

A port replicater stated in claim 10 that is connectable to a function expanding
25 device which includes a first connection part connectable to a unit which expands a function of electronic hardware, a second connection part connectable to the electronic

hardware, and an operation part of the unit, comprises a third connection part connectable to the second connection part of the function expanding device, and a fourth connection part connectable to the electronic hardware. This port replicater is novel in comparison with a conventional port replicater in having the third connection
5 part connectable to the second connection part of the function expanding device.

A function expanding device stated in claim 11 comprises a first connection part connectable selectively to a plurality of units each of which expands a function of electronic hardware, a second connection part connectable to the electronic hardware, and a third connection part connectable to the electronic hardware. This function
10 expanding device is novel in having two connection parts.

In the invention stated in claim 11, as an example, the second connection part in this function expanding device connects to the electronic hardware a unit which has been able to be connected to the function expanding device. On the other hand, the third connection part connects to the electronic hardware the unit designed to be newly
15 connected to it.

An attempt to connect a newly introduced unit and a conventionally expandable unit to the electronic hardware by one connection part would necessarily alter a conventional connection part for connection with the electronic hardware. In contrast, according to the above structure stated in claim 11, the third connection part
20 connects the newly introduced unit to the electronic hardware without changing the design of the connection part in the electronic hardware, whereas the second connection part serves as a connection part between the conventionally connectable unit and electronic hardware. It is therefore sufficient to design only the third connection part for the additional unit. The reduction of the number of development
25 steps for the entire apparatus and the appropriation of the conventional equipment would reduce the development cost. Instead, the third connection part may connect

the conventionally connectable unit to the electronic hardware while the second connection part may connect to the electronic hardware the newly introduced unit designed to be connected to it. When the unit group is divided into the second and third connection parts, the number of units for each connection part becomes reduced
5 in comparison with that where only one connection part handles all the units. When the connection part is a connector or a cable, the number of signal lines reduces and becomes small.

In the function expanding device stated in claim 12 that depends upon claim 11, these second and third connection parts may be used to connect to the electronic hardware those units connectable to the first connection part, but different with each other. The second connection part may be used to connect to the electronic hardware at least one of said plurality of units connectable to the first connection part, and wherein the third connection part may be used to connect to the electronic hardware at least one of the units connectable to the first connection part, which unit is different
10 from the unit connected by the second connection part.
15

In the invention stated in claims 12 or 13, as an example, the second connection part connect to the electronic hardware the unit that has been connectable to the function expanding device in the conventional structure, while the third connection part connect to the electronic hardware the unit designed to be newly
20 connected to it.

An attempt to connect a newly introduced unit and a conventionally expandable unit to the electronic hardware by one connection part would necessarily alter a conventional connection part to the electronic hardware. In contrast, according to the above variations stated in claim 12 or 13, the third connection part connects the
25 newly introduced unit to the electronic hardware without changing the design of the connection part in the electronic hardware, whereas the second connection part serves

as a connection part between the conventionally connectable unit and electronic hardware. It is therefore sufficient to design only the third connection part for the additional unit. The reduction of the number of development steps for the entire apparatus and the appropriation of the conventional equipment would reduce the
5 development cost.

Instead, the third connection part may connect the conventionally connectable unit to the electronic hardware while the second connection part may connect to the electronic hardware the newly introduced unit designed to be connected to it. The second and third connection parts handle different units, and the number of units for
10 each connection part becomes reduced in comparison with that where only one connection part handles all the units. When the connection part is a connector or a cable, the number of signal lines reduces and becomes small.

Other objects and further features of the present invention will become readily apparent from the following description of the embodiments with reference to
15 accompanying drawings.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a schematic perspective view of a computer system of the present
20 invention.

FIG. 2 is an exemplified block diagram of the computer system shown in FIG.
1.

FIG. 3 is an upper view of a bay attachment shown in FIG. 1.

FIG. 4 is a front view of the bay attachment shown in FIG. 1.

25 FIG. 5 is a rear view of the bay attachment shown in FIG. 1.

FIG. 6 is a rear view of the port replicater shown in FIG. 1.

FIG. 7 is an upper view of the port replicater shown in FIG. 1.

FIG. 8 is another exemplified block diagram of the computer system shown in FIG. 1.

FIG. 9 is a function expanding device disclosed in a prior patent application
5 filed by this applicant.

DETAILED DESCRIPTION OF INVENTION

A description will now be give of computer system 100 according to the
10 present invention, with reference to FIGs. 1 and 2. FIG. 1 is a schematic perspective
view of the computer system 100, and FIG. 2 is a block diagram thereof. As shown in
FIG. 1, the computer system 100 of the present invention includes notebook PC 10,
cable 48, function expanding device (bay attachment) 50, expanding unit 70, and port
replicater 80.

15 The present invention is not limited to notebook PCs, but applicable to so-
called laptop PCs, portable PCs, and mobile PCs.

Referring to FIG. 1, the notebook PC 10 may employ any structure known in
the art, and install a mouse, trackball, joystick, etc. The notebook PC 10 is connected
to the external power source via an AC adapter or a detachable lithium battery. The
20 notebook PC 10 is a typical example of electronic hardware, but the electronic
hardware to which the present invention is applicable is not limited to this type.

Although this embodiment describes using a data processor, such as notebook
PCs, laptop PCs, portable PCs, and mobile PCs, the present invention is applicable, in
addition to so-called computer, to personal digital assistances ("PDAs"), electronic
25 notebooks, etc. Moreover, the present invention and embodiment are not limited to
data processors, but other electronic hardware. For example, the bay attachment 50

may be directly connected to a speaker and a headphone in order to reproduce a music CD.

Referring to FIG. 2, the notebook PC 10 includes CPU 12, host bus 14, chip set (440DX) 16, memory 18, PCI bus 20, IDE controller 22, bay controller 24, IDE interface 26, internal HDD 28, source circuit 30, amplifier 32, speaker 34, and music interface 36. The CPU 12 controls an operation of each hardware and software, and may communicate via the host bus 14 the chip set 16 and memory 18, such as a RAM. Necessary programs are downloaded to the memory 18 from the HDD 28. The CPU 12 is connected to the IDE controller 22, bay controller 24 and source circuit 30 via the PCI bus 20. The IDE controller 22 transmits an instruction in accordance with the software stored in the HDD 28 to the bay attachment 50 under control by the CPU 12. The bay controller 24 transmits a power-on signal to the bay attachment 50 and expanding unit 70 connected to it.

The port replicator 80 includes, as shown in FIG. 6, a pair of screws 81a and 81b, USB port 82, keyboard or mouse connector 83, multi-bay adapter 84, floppy disc connector 85, CRT connector 86, parallel interface 87, and serial interface 88. Hereupon, FIG. 6 is a rear view of the port replicator. As shown in FIG. 7, the port replicator 80 includes connector 89 to notebook PC 10. Hereupon, FIG. 7 is an upper view of the port replicator 80.

The screws 81a and 81b are used to attach the port replicator 80 to the notebook PC 10. The USB port 82 is used for a USB connection to another electronic hardware. A keyboard or mouse may be connected to the keyboard or mouse connector 83. A printer etc. may be connected to the parallel interface 87. A modem etc. may be connected to the serial interface 88.

The port replicator 80 advantageously includes the multi-bay 84 and the floppy disc connector 85. The multi-bay adapter 84 is formed, for example, as male

64 pins, and connectable to the cable 48 having connector 481 with female 64 pins. The floppy disc connector 85 in the port replicator 80 is formed, for example, as male 26 pins, and connected to a connector (not shown) accommodated in the floppy disc storage part 55 via a cable (not shown) when the expanding unit 70 is a FDD as described later. The storage part 55 has a floppy disc connector inside a lid in FIG. 5. This connector is connected to the floppy disc connector 85 of the port replicator 80 in FIG. 6 through a cable. The bay attachment 50 connects, when thus connected to a FDD as the expanding unit 70 (FIG. 1), the FDD to the notebook PC body 10 via the port replicator 80.

The FDD is connected to the notebook PC body 10 via the port replicator 80 in the embodiment shown in FIGs. 1 and 6, while a connector accommodated in the floppy disc connector storage part 55 (FIG. 5) may be connected to the notebook PC body 10 via a cable without using port replicator 80. According to this structure, the connector corresponding to the floppy disc connector 85 in the port replicator 80 in FIG. 6 is connected to the cable accommodated in the floppy disc connector storage part 55 (FIG. 5) via the cable. The connector corresponding to the floppy disc connector 85 in the port replicator 80 in FIG. 6 may be located at any place in the notebook PC body 10. As an example, it is provided at the rear surface of the notebook PC body 10 (or a part to which the port replicator 80 is connected in FIG. 1).

The floppy disc connector stored in the floppy disc connector storage part 55 may be used to simply expand the notebook PC 10 with an external FDD.

The cable 48 has an IDE interface and an analog music interface, as described later. The cable 48 is connected detachably to the port replicator 80, but may be connected detachably to the bay attachment 50. For example, a preparation of a plurality of cables 48 having different lengths would enhance the operability of the computer system 100. The cable 48 spaces the notebook PC 10 from the bay

attachment 50, thereby facilitating the miniaturization of the notebook PC 10 in comparison with the notebook PC 10 having an internal bay attachment.

Referring to FIG. 2, the bay attachment 50 includes storage part 51, control part 52, LT-LCD 54, operation part 56, and connector 58. The storage part 51 may detachably store the expanding unit 70. As far as the bay attachment 50 is made connectable to the expanding unit 70, it is not necessary to store the expanding unit in the storage part 51. The storage part 51 is preferable in that it protect the expanding unit 70 from tilt, direct vibration and impact. Although the control part 52, LT-LCD 54 and operation part 56 are schematically shown in FIG. 2, the LT-LCD 54 and the operation part 56 are connected to and controlled by the control part 52.

The control part 56 includes, as shown in FIG. 3, rewind (return by one tune) button 56a, stop/eject button 56b, reproduction/pose button 56c, fast-forward (skip by one tune) button 56d, power source button 56e, unlock button 56f, and lamp 56g. FIG. 3 is an upper view of the bay attachment 50. The rewind button 56a returns music on a music CD by one tune, whereas the fast-forward button 56d skips music on a music CD by one tune. The stop/eject button 56b stops reproduction of a music CD, and ejects, when pressed twice, a medium in the expanding unit 70, such as a CD-ROM. The reproduction/pose button 56c reproduces and temporarily stops the reproduction of a music CD.

The power source button 56e is used to power on and off the bay attachment 50 and the extension unit 70 when no application software are activated in the notebook PC 10. When application software runs in the notebook PC 10, the bay controller 24 controls power on and off of them and the power source button 56e does not work substantially. Optionally, even in this case, operational information of the power source button 56e may be sent as a bay switch information signal to the bay controller 24 so as to reflect it on the application software. The unlock button 56f is

used to electrically eject the expanding unit 70 from the bay attachment 50 during a process of the expanding unit 70 (such as a reproduction). The lamp 56g indicates red during a process of the expanding unit 70 and turns to green when the unlock button 56f is pressed. The unlock button 56f is convenient, for example, when the expanding unit 70 is replaced from a CD-ROM drive to DVD-ROM drive without turning off the power source. Instead of means for electrically ejecting the expanding unit 70, such as unlock button 56f, means for mechanically ejecting the expanding unit 70 from the bay attachment 50 may be provided as floppy disc ejecting means provided in a general-purpose FDD.

As shown in FIG. 4, the bay attachment 50 has front door 53 that is forced in a closing direction by a spring etc. at a front surface thereof. The expanding unit 70 is inserted into the storage part 51 against the spring force through the front door 53. Optionally, the bay attachment 50 may always open at a portion corresponding to the front door 53 without providing the front door 53. As shown in FIG. 5, the bay attachment 50 has floppy disc connector storage part 55 at the rear surface in addition to the cable 48, and a floppy disc connector is provided inside the lid in FIG. 5 of the storage part 55. Hereupon, FIG. 4 is a front view of the bay attachment, while FIG. 5 is a rear view of the bay attachment.

The bay attachment 50 and expanding unit 70 receive power from the notebook PC 10, and are made operable by the power on signal from the bay controller 24. Optionally, the bay attachment 50 and expanding unit 70 may include a unique AC adapter and battery. The bay attachment 50 serves as a charger to the battery pack. The bay attachment 50 has a bay structure, and is connectable compatibly to plural types of expanding units 70 as described later. The bay attachment 50 is connectable to the notebook PC 10 via one cable 48 (or port replicator 80), and has connector 58 in the storage part 51 in the housing that is commonly used for different

connectors when a FDD and a CD-ROM drive having these different connectors are used as an expanding unit 70.

The bay attachment 50 in this embodiment is connected to the notebook PC via the port replicater 80, but may be connected to the notebook PC without the port replicater 80. In this case, a member corresponding to the multi-bay adapter 84 shown in FIG. 6 is provided in the notebook PC body 10 and connected to the connector 481 in the bay attachment 50. A member corresponding to the multi-bay adapter 84 may be located at any place in the notebook PC 10 body. As an example, the member corresponding to the multi-bay adapter 84 may be provided in the back of the notebook PC 10 body (or a portion to which the port replicater 80 is connected in FIG. 1).

The expanding unit 70 is selected from a group including, for example, a FDD, a CD-ROM drive, a magneto-optical (MO) disc drive, an LS-120 drive, a digital video disc (DVD-ROM) drive, a HDD, and an AC/DC adapter. Therefore, many devices are applicable to the expanding unit 70 and make the notebook PC 10 multifunctional. The control part 52 may identify which device is inserted into the expanding unit 70. Any identification method may be used. For example, $2^3=8$ identification patterns would be obtained by independently flowing high and low signals through three signal lines. Therefore, eight types of devices as the expanding units 70 may be identified by using such a signal combination.

With reference to FIG. 2, a description will now be given of reproduction of a music CD inserted into expanding unit 70 as a music CD reproducer. FIG. 2 omits the port replicater 80 and cable 48 for illustration purposes. Alternatively, FIG. 2 may be understood as an explanatory view of the bay attachment 50 connected to the notebook PC without port replicater 80.

A description will now be given of a reproduction of a music CD by

application software installed in the notebook PC 10. In this case, an operating system (OS) such as Windows 98® that has been stored in the internal HDD 28 is initiated. Then, application software that is operable on such an OS is run. For example, when a music CD is selected by clicking a mouse not shown in FIG. 1 on the application software, the bay controller 24 sends power on signal P_{ON} to the bay attachment 50 so as to power it on. The IDE controller 22 instructs, under control by the CPU 12, the control part 52 of the bay attachment 50 to reproduce the music CD via the IDE interface 26.

In response, the control part 52 instructs the music CD reproducer 70 to reproduce the music CD. The reproduced audio signal is supplied to the amplifier 32 via the music analog interface 36. Hereupon, the amplifier 32 receives the power on signal P_{ON} from the source circuit 30, not from the bay attachment 50. Information on the reproduction time and the order of tunes etc. on the music CD may be indicated on the LT-LCD 54, but usually indicated only on the display of the notebook PC 10. The amplifier 32 transmits the amplified signal to the speaker 34 by amplifying the audio signal. Thereby, the music CD is reproduced from the speaker 34.

A description will now be given of a reproduction of a music CD through an operation of the operation part 56 in the bay attachment 50 where the OS in the notebook PC 10 is initiated. In this case, the bay attachment 50 supplies to the bay controller 24 bay switch information signal BS that informs that the operation part 56 is pressed in the bay attachment 50. The bay switch information signal BS serves to reflect the operation of the operation part 56 on the application software. In other words, it has a similar effect to mouse click selecting a reproduction of the music CD. No reproduction instruction is sent from the IDE controller 32 in this case.

Then, the reproduced audio signal is supplied to the amplifier 32 via the music analog interface 36. Here, the amplifier 32 receives the power on signal P_{ON} from the

source circuit 30, not from the bay attachment 50. Information on the reproduction time and the order of tunes etc. on the music CD may be indicated on the LT-LCD 54, but usually indicated only on the display of the notebook PC 10. The amplifier 32 transmits the amplified signal to the speaker 34 by amplifying the audio signal.

5 Thereby, the music CD is reproduced from the speaker 34.

A description will now be given of a reproduction of a music CD through an operation of the operation part 56 in the bay attachment 50 where no power is on (*i.e.*, OS does not run) and the notebook PC 10 is powered on by an AC convenience outlet or battery. In this case, the bay controller 24 and source circuit 30 does not become operable even when the bay attachment 50 supplies to the bay controller 24 the bay switch signal BS that informs that the operation part 56 is pressed in the bay attachment 56. Therefore, the bay switch information signal BS neither substantially work, nor contributes to the reproduction of the music CD except for the amplifier 32 and speaker 34.

10 In this case, characteristically, the control part 52 in the bay attachment 50 operates independent of the CPU 12, IDE controller 22 and bay controller 24 in the notebook PC 10. The controller 52 transmits the power on signal P_{ON} to the amplifier 32 so as to make it operable and the reproduced audio signal to the amplifier 32. Information on the reproduction time and the order of tunes etc. on the music CD may be indicated on the LT-LCD 54. The display on the notebook PC 10 is not power on and thus indicates no information. The amplifier 32 transmits the amplified signal to the speaker 34 by amplifying the audio signal. Thereby, the music CD is reproduced from the speaker 34.

15 Although the above description exemplifies a CD-ROM drive, the present invention is applicable to a DVD-ROM drive and other expanded devices.

Although the bay attachment 50 uses as a connection part the cable 48 and the

connector 481 to be connected to the notebook PC 10 (with or without port replicater 80) in this embodiment, the connection part of this embodiment may cover the direct and indirect connection with the electronic hardware. As described in the embodiment, the bay attachment 50 may be connected to the notebook PC 10 directly
5 or via the port replicater 80. In either structure, the cable 48 and the connector 481 of the present invention each constitute a connection part.

In addition, although this embodiment uses the cable 48 and connector 481, the present invention is not limited to these examples. Without the cable 48, the bay attachment 50 may be connected to the notebook PC as an integrated body. This
10 connection mode is the same as that where a so-called docking station is connected to a portable computer. As explained with reference to FIG. 9, the bay housing 270 may be connected to the portable computer 40. This type of connection would require the operation part to be equipped with an aspect of the bay housing 270, for example.

Although the above examples connect the bay attachment 50 to the notebook
15 PC 10 by the cable 48, connector 481, male 64 pins, female 64 pins etc., the bay attachment 50 may be connected to the notebook PC 10 by a radio format, such as infrared or electromagnetic wave. As an example, the infrared transmitter/receiver module bay attachment 50 may be connected to the notebook PC 10. As an example, the infrared transmitter/receiver module (which includes an infrared LED, a
20 photodiode, and a modulator/demodulator) may be provided with both the bay attachment 50 and the notebook PC 10 so as to secure data communications. The transmitter/receiver may be made by a photodiode and an infrared LED. This type of connection may use, but is not limited to, the infrared data communication standard prescribed by the well-known IrDA (Infrared Data Association). The radio
25 communication is not limited to the above infrared, but may use other electromagnetic waves. The communication does not require a bi-directional communication between

the bay attachment 50 and the notebook PC body 10, and may use a uni-directional communication from the bay attachment 50 to the notebook PC body 10. As described, the radio connection constitutes one type of connection in the present invention.

5 As described above with reference to FIG. 3, the bay attachment 50 includes two connection parts. With reference to FIG. 8, a description will now be given of an embodiment about the notebook PC body 10 whose supplemental function is expanded by providing the CD-ROM drive 702, LS-120 drive 703, DVD-ROM drive 704 in the bay attachment 50 (FIGs. 3 and 8). Those elements in FIG. 8 which are designated by
10 the same reference numerals in other figures denote the same elements. The cable 48 and the connector 481 (FIGs. 3 and 8) each are a connection part which connects the notebook PC body 10 to the bay attachment 50, and include interfaces for the CD-ROM drive 702, LS-120 drive 703, and DVD-ROM drive 704. One of the CD-ROM drive 702, LS-120 drive 703, and DVD-ROM drive 704 is connected to the bay
15 attachment 50, as described with reference to FIGs. 1 through 7.

The floppy disc drive 701 is connected, as described with reference to FIG. 5, to the notebook PC body 10 via a cable (551 in FIG. 8) and a cable (not shown) stored in the floppy disc connector storage part 55. The storage part 55 stores a connector for a floppy disc inside the lid in FIG. 5. This connector is connected to the floppy
20 disc connector in the port replicater 80 in FIG. 6 via a cable. When the FDD is connected as an expanding unit 70 (FIG. 1) to the bay attachment 50, the floppy disc drive (701 in FIG. 8) is connected to the notebook PC body 10 via the cable 551 (FIG. 8) and the port replicater 80.

Although the port replicater 80 connects the FDD to the notebook PC body 10
25 in the embodiments shown in FIGs. 1, 6 and 8, the connector stored in the floppy disc connector storage part 55 (FIG. 5) may use the cable 551 (FIG. 8) for connection with

the notebook PC body 10 without the port replicator 80. This structure may require the notebook PC body 10 to include a connector corresponding to the floppy disc connector 85 in the port replicator 80 so as to be connectable to the connector stored in the floppy disc connector storage part 55 (FIG. 5) via the cable 551. The connector
5 corresponding to the floppy disc connector 85 in the port replicator 80 may be located at any place in the notebook PC 10. As an example, it may be provided at the rear of the notebook PC body 10 (or a portion to which the port replicator 80 is connected). The connector stored in the floppy disc connector storage part 55 may be used to simply expand the notebook PC 10 with an external FDD.

10 According to the structure shown in FIG. 8 (or FIGs. 3 and 5), the FDD 701 is connected by the connector 55 and cable 551 which are different interface than the cable 48 and connector 481 as an interface for the CD-ROM drive 702, LS-120 drive 703 and DVD-ROM drive 704 (although the connector at the side of the port replicator is omitted).

15 For example, suppose there is a unit which uses the cable 48 and connector 481 (FIG. 3) as an interface to enhance a function of the notebook PC body 10 by providing the CD-ROM drive 702, LS-120 drive 703 and DVD-ROM drive 704 in the bay attachment 50 (FIGs. 3 and 8), (although the existence of such a unit is assumed for explanation purposes of the invention and this assumption does not admit that such
20 a unit was known or used at the time of filing of this application.) When a new FDD unit (701) is attempted to be expanded later, this embodiment does not use the cable 48 and connector 481 as an interface for the FDD unit (701). If only one connection part (such as a cable and connector) is used as an interface for a new device (such as the FDD unit 701 in this example), the cable 48 and connector 481 (FIGs. 3 and 8) should
25 be changed in specification or design. Accordingly, as shown in FIGs. 5 and 8, this embodiment provides, as an interface for the newly introduced object, *i.e.*, FDD,

another cable 551, connector (stored in the floppy disc connector storage part 55 in FIG. 5), the connector (not shown) of the cable 551 connectable to the foregoing connector, and the connector (not shown) of the cable for connection with the port replicater 80, eliminating the necessary design change of the cable 48 and connector
5 481.

As described, the present invention eliminates a great design change of the bay attachment and merely adds an interface cable or connector for a newly introduced unit when the newly introduced unit is attempted to the bay attachment 50 for the computer at the subsequent stage. The computer at the subsequent stage is expanded with the
10 newly introduced unit only when the newly introduced unit is connected to the bay attachment 50, without changing the bay attachment 50 and the cable for each additional unit. The reduction of the number of development steps for the entire apparatus and the appropriation of the conventional equipment would contribute to the reduction of the development cost.

Although FIGs. 1, 3 and 8 refer to the cable connecting the bay attachment 50 to the notebook PC 10, a design change of the cable 48 for the newly introduced expanding unit would increase the number of signal lines and thicken the cable. When the cable becomes thick, the flexuosity of the cable becomes lowered. The low
15 flexuosity would restrict the arrangement of the bay attachment, for example, on a desk, and thus the cable should be relatively long to secure certain flexuosity. On the other hand, the present invention employs another cable as another connection part for use with an interface of the newly introduced expanding unit, and would not thicken the
20 cable or deteriorate its flexuosity. Therefore, no long cable 48 is needed.

The newly introduced cable 551 might be detachable to the bay attachment 50.
25 FIGs. 3 and 5 illustrate that the connector that is connectable to the cable 551 is stored in the floppy disc connector storage part 55 (FIG. 5). This structure does not require

two cables to be always connected to the bay attachment 50, facilitating an operation of the bay attachment 50. The FDD cable 551 is detachable for users who do not use the FDD, so as to enhancing the portability and other features of the bay attachment 50. A structure that makes the cable 48 detachable may be adopted. One of the objects and effects of the present invention may be achieved by fixing the cable 551 onto the bay attachment 50 as the cable 48 in FIG. 3.

The present invention covers a structure that does not use the cable 48. The connection part of the present invention is not limited to the cables 48 and 551. The present invention covers, for example, a connection structure similar to that between the bay housing 270 and the portable PC 240 in FIG. 9. The connector 95 shown in FIG. 9 may be connected, when the cable 48 is not used, to the connector provided at the lower part in the portable PC 240. The present invention use, when applied to the structure shown in FIG. 9, the previously provided connector 95 as an interface for the previously provided expanding units. Another and new connector is provided as an interface for the newly introduced expanding unit in the bay housing 270 so as to connect the new expanding unit to the portable PC 40. Another connector part that is connectable to the new connector may be provided, as in the connector 95, at the bottom of the portable PC 40. Even in this case, the reduction of the number of development steps for the entire apparatus and the appropriation of the conventional equipment would contribute to the reduction of the development cost.

The above embodiments refer to the FDD as a new expanding unit for illustrative purposes, and any other device may be used as an expanding unit.

The present invention has been thus discussed in a case where a new expansion FDD is introduced to a device using as an interface the cable 48 and connector 481 so as to expand a function of the notebook PC body 10 by providing the CD-ROM drive 702, LS-120 drive 703 and DVD-ROM drive 704 in the bay

attachment 50 (FIGs. 3 and 8). However "a device using as an interface the cable 48 and connector 481 so as to expand a function of the notebook PC body 10 by providing the CD-ROM drive 702, LS-120 drive 703 and DVD-ROM drive 704 in the bay attachment 50" is merely assumed for explanation purposes of the present invention, and this assumption does not admit that such a unit was known or used at the time of filing of this application.

Further, the present invention is not limited to these preferred embodiments, but various variations and modifications may be made without departing from the scope of the present invention.

This application also discloses the following invention. This invention comprises a function expanding device including a first connection part connectable to a unit that expands electronic hardware, a second connection part connectable to the electronic hardware, and a third connection part connectable to said electronic hardware. According to this invention, the second connection part, for example, connects to the hardware the unit that has been conventionally connected to the function expanding device. The third connection part connects to the electronic hardware the unit that is newly designed to be connectable to the electronic hardware. An attempt to connect a newly introduced unit and a conventionally expandable unit to the electronic hardware by one connection part would necessarily alter a conventional connection part to the electronic hardware. In contrast, according to this inventive structure, the third connection part connects the newly introduced unit to the electronic hardware without changing the design of the connection part in the electronic hardware, whereas the second connection part serves as a connection part between the conventionally connectable unit and electronic hardware. It is therefore sufficient to design only the third connection part for the additional unit. The reduction of the number of development steps for the entire apparatus and the appropriation of the

conventional equipment would reduce the development cost. Instead, the third connection part may connect the conventionally connectable unit to the electronic hardware while the second connection part may connect to the electronic hardware the newly introduced unit designed to be connected to it. When the unit group is divided
5 into the second and third connection parts, the number of units for each connection part becomes reduced in comparison with that where only one connection part handles all the units. When the connection part is a connector or a cable, the number of signal lines reduces and becomes small. This inventive structure has been described with reference to FIGs. 5, 8 etc.

10 The function expanding device stated in claim 1 comprises an operation part for a unit that expands a function of electronic hardware, and thus enables the unit to be operated not only by the electronic hardware but also by the function expanding device. Therefore, the function expanding device itself becomes multifunctional.

15 The function expanding device stated in claim 2 may reproduce a music CD as a unit medium using a function expanding unit without using a control part in the electronic hardware. Therefore, the function expanding device may save labor and power associated with an initiation of application software in electronic hardware, enhancing the operability.

20 According to the function expanding device stated in claim 3, the operation part may power on at least part of the electronic hardware. For example, when the electronic hardware has an amplifier which amplifies an audio signal of a music CD, the operation part may transmit the power-on signal to the amplifier. Therefore, even when the power-on signal is not supplied to the amplifier after the application in the electronic hardware is run, if power is supplied to the electronic hardware (by an AC
25 adapter or a battery) the control part of the function expanding device may control the amplifier in the electronic hardware

According to the function expanding device stated in claim 4, the control part may (instruct a related component to) transmit operational information of the operation part to the electronic hardware. Therefore, for example, the operational information of the operation part may reflect on and synchronize with application software in the electronic hardware. Thereby, a similar effect may be obtained by an operation of the operation part in the function expanding device in addition to an operation of the electronic hardware by a mouse click.

According to the function expanding device stated in claim 5, the second connection part is connectable to the electronic hardware via a port replicater.

According to the function expanding device stated in claim 6, the second connection part may have a cable, and the cable spaces the electronic hardware from the function expanding device. Therefore, this electronic hardware may be made light and smaller than the electronic hardware that has been directly connected to the function expanding device. In addition, an arrangement of the function expanding device and the electronic hardware in accordance with a shape of the installation space would enhance the operability.

The function expanding device stated in claim 7 may further comprise a display part which displays a status of the unit, and a user of the function expanding device may confirm the operation. In particular, this function expanding device is suitable when only the control part of the function expanding device controls the unit without using the display part (for example, a LCD) in the electronic hardware.

According to the function expanding device stated in claim 8, the unit may use a plurality of devices, such as a music CD drive, a CD-ROM drive, a DVD-ROM drive, and an LS-120 drive. Therefore, the electronic hardware need not conveniently have a connection part for each unit drive, and may become multifunctional and miniature.

According to the function expanding device stated in claim 9, the second

connector may use IDE and music interfaces, and thus the electronic hardware may become multifunctional.

A port replicater stated in claim 10 may connect the above function expanding device to the electronic hardware. More concretely, this port replicater is novel in comparison with a conventional port replicater in having the third connection part connectable to the second connection part.

A function expanding device stated in claim 11 may enable a design of the third connection part for an additional unit. The reduction of the number of development steps for the entire apparatus and the appropriation of the conventional equipment would reduce the development cost. When the unit group is divided into the second and third connection parts, the number of units for each connection part becomes reduced in comparison with that where only one connection part handles all the units. When the connection part is a connector or a cable, the number of signal lines reduces and becomes small.

According to still another aspect of the present invention, as stated in claim 12 or 13, the third connection part connects the newly introduced unit to the electronic hardware without changing the design of the connection part in the electronic hardware, whereas the second connection part serves as a connection part between the conventionally connectable unit and electronic hardware. It is therefore sufficient to design only the third connection part for the additional unit. The reduction of the number of development steps for the entire apparatus and the appropriation of the conventional equipment would reduce the development cost. When the connection part is a connector or a cable, the number of signal lines reduces and each connection part becomes small. More specifically, a smaller connector or thinner cable may be provided.

What is claimed is:

1. A function expanding device comprising:
a first connection part connectable to a unit which expands a function
5 of electronic hardware;
a second connection part connectable to the electronic hardware; and
an operation part for the unit.
2. A function expanding device according to claim 1, further comprising
10 a control part which may control the unit independent of the electronic hardware.
3. A function expanding device according to claim 1, wherein said
operation part may power on at least part of the electronic hardware.
- 15 4. A function expanding device according to claim 2, wherein said
control part may transmit operational information of the operation part to the electronic
hardware.
5. A function expanding device according to claim 1, wherein said
20 second connection part is connectable to a port replicater, and connectable to the
electronic hardware via the port replicater.
6. A function expanding device according to claim 1, wherein said
second connection part has a cable.
- 25 7. A function expanding device according to claim 1, further comprising

a display part which displays a status of the unit.

8. A function expanding device according to claim 1, wherein the unit is selected from a group including a music CD drive, a CD-ROM drive, a DVD-ROM drive, and an LS-120 drive, and said first connection part has a bay structure connectable compatibly to either drive in the group.

9. A function expanding device according to claim 1, wherein said second connector has an IDE interface and a music interface.

10. A port replicator connectable to a function expanding device which includes a first connection part connectable to a unit which expands a function of electronic hardware, a second connection part connectable to the electronic hardware, and an operation part of the unit, said port replicator comprising:

a third connection part connectable to the second connection part of the function expanding device; and

a fourth connection part connectable to the electronic hardware.

11. A function expanding device comprising:
a first connection part connectable selectively to a plurality of units each of which expands a function of electronic hardware;

a second connection part connectable to the electronic hardware; and

a third connection part connectable to the electronic hardware.

12. A function expanding device according to claim 11, wherein said second and third connection parts are used to connect to the electronic hardware the

unit connectable to the first connection part, but connect different units to the electronic hardware.

13. A function expanding device according to claim 11, wherein said
5 second connection part is used to connect to the electronic hardware at least one of said plurality of units connectable to the first connection part, and

wherein said third connection part is used to connect to the electronic hardware at least one of the units connectable to the first connection part, which unit is different from the unit connectable by the second connection part.

10

14. A function expanding device comprising:

a first connection part connectable to a unit that expands electronic hardware;

a second connection part connectable to the electronic hardware; and

15

a third connection part connectable to the electronic hardware.

ABSTRACT OF THE DISCLOSURE

The present invention has an object to provide a function expanding device which may render electronic hardware multifunctional, light, small, and easy to
5 operate. The function expanding device of the present invention includes a first connection part connectable to a unit that expands a function of the electronic hardware, a second connection part connectable to the electronic hardware, and an operation part for the unit.

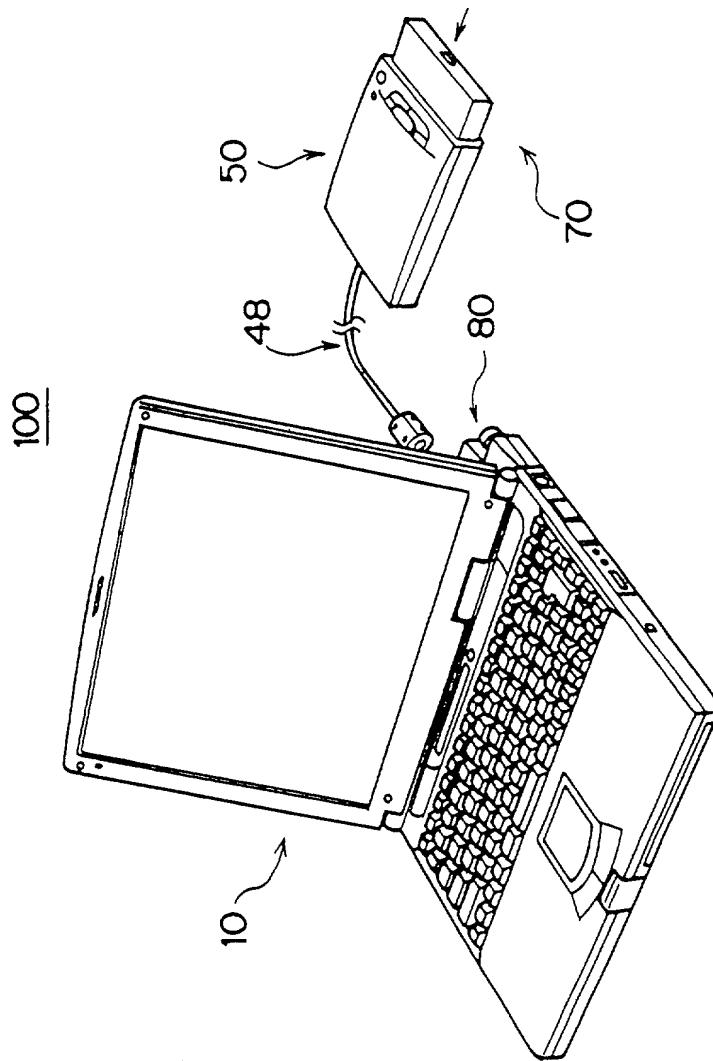


FIG. 1

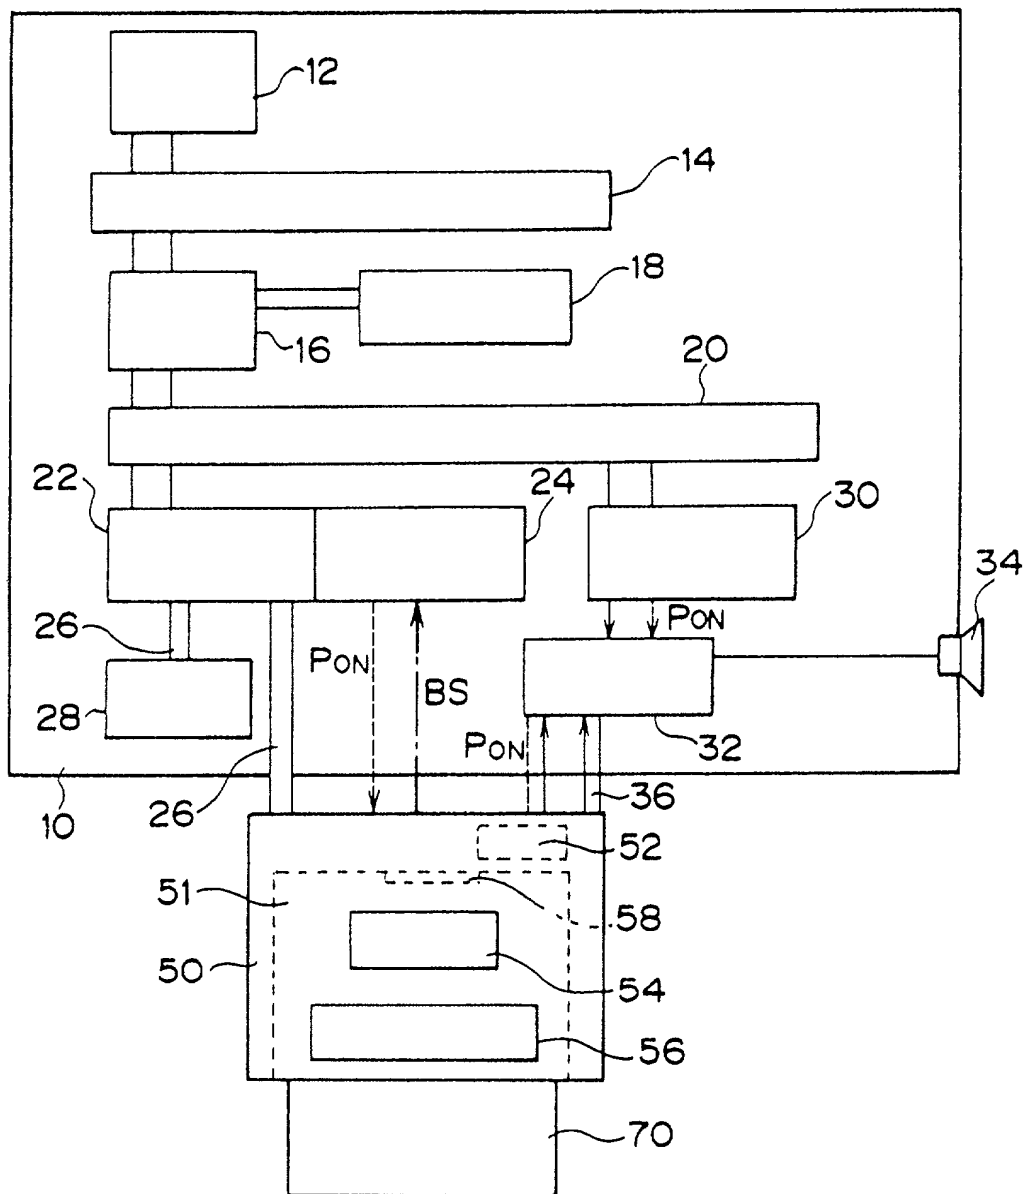


FIG. 2

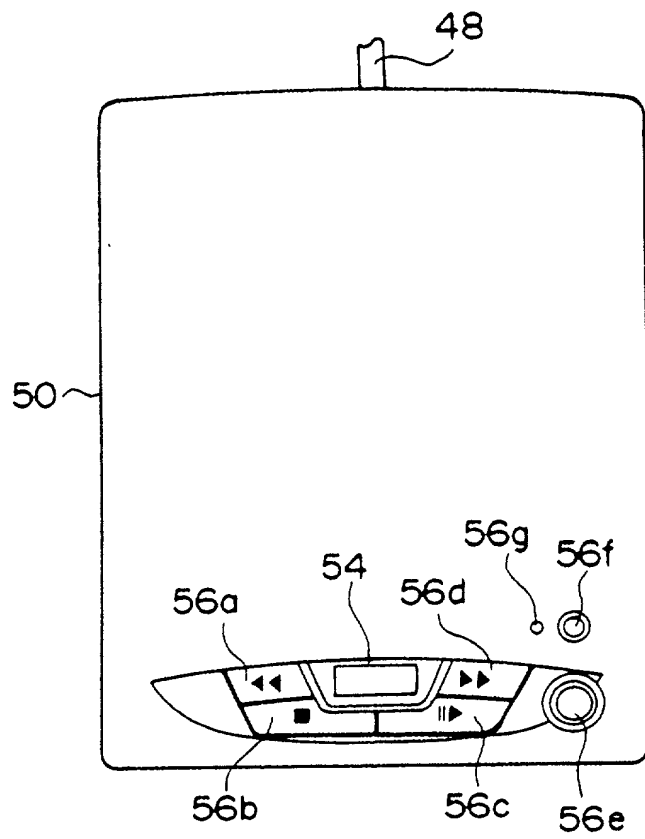


FIG. 3

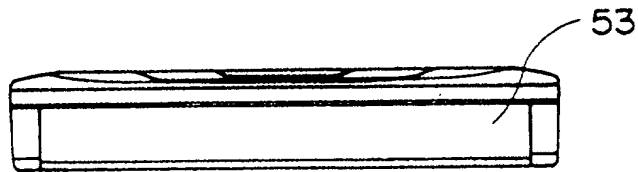


FIG. 4

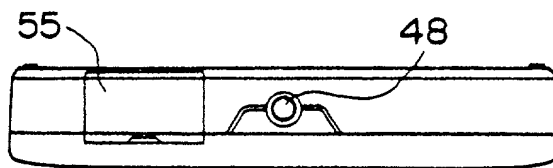


FIG. 5

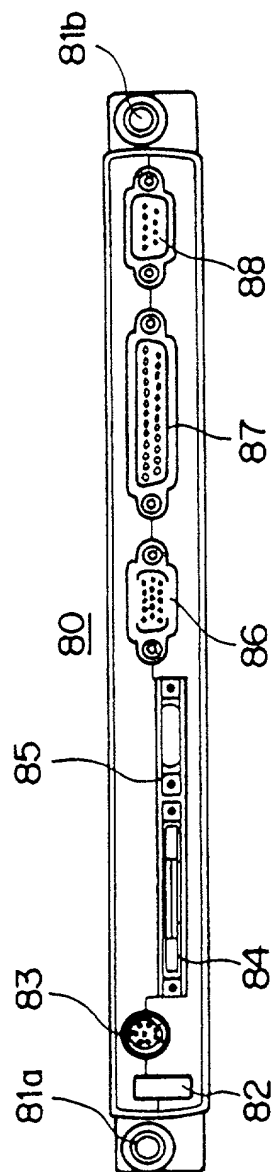


FIG. 6

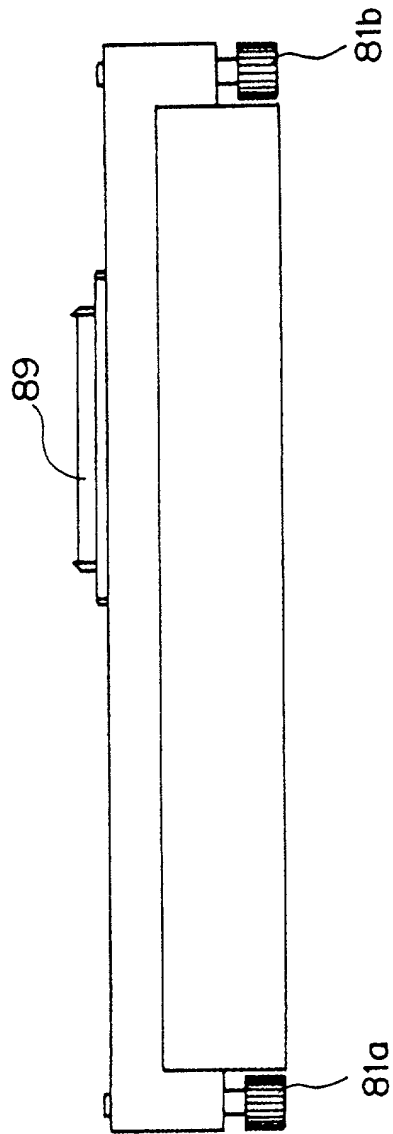


FIG. 7

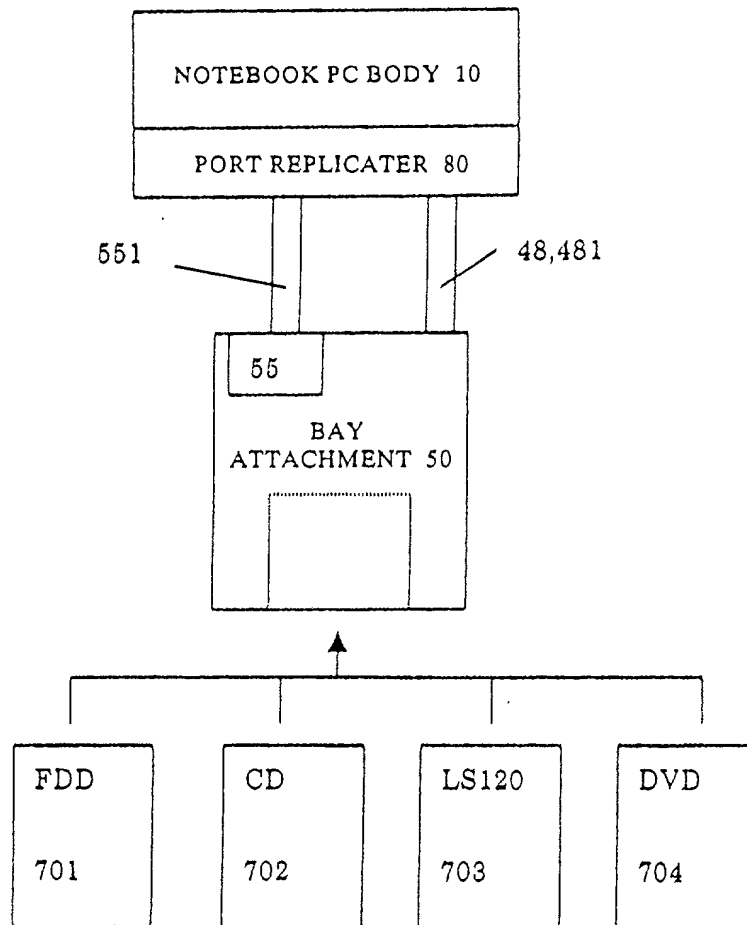


FIG. 8

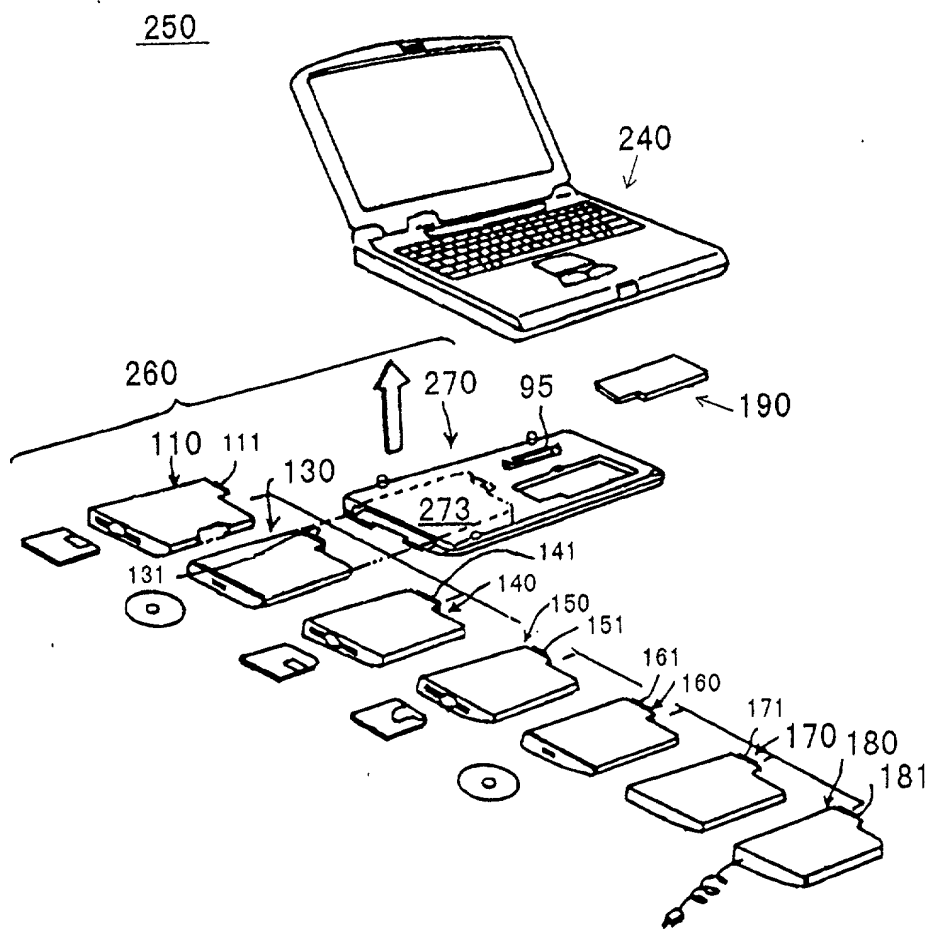


FIG. 9

Under the Paperwork Reduction Act of 1996, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

FUNCTION EXPANDING DEVICE FOR
ELECTRONIC HARDWARE

上記発明の明細書（下記の欄でx印がついていない場合は、本意に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Page 1 of 3

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一ヶ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

91-015758

(Number)

(番号)

JAPAN

(Country)

(国名)

(Number)

(番号)

(Country)

(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 118 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

25/01/1999

(Day/Month/Year Filed)

(出願年月日)

(Day/Month/Year Filed)

(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938; Michael C. Soldner, 41,455; Norman L. Ourada, 41,235; Kevin R. Spivak, P-43,148; and William M. Schertler, 35,348 (agent)

書類送付先

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名		Full name of sole or first inventor	
		TATSUYA FUJIKI	
発明者の署名	日付	Inventor's signature	Date
		Tatsuya Fujiki	November 30, 1999
住所		Residence	
		Kawasaki-shi, Kanagawa 211-8588, Japan	
国籍		Citizenship	
		Japan	
私書箱		Post Office Address	
		c/o FUJITSU LIMITED 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan	
第二共同発明者		Full name of second joint inventor, if any	
		TOMONORI HATANO	
第二共同発明者	日付	Second inventor's signature	Date
		Tomonori Hatano	November 30, 1999
住所		Residence	
		Kawasaki-shi, Kanagawa 211-8588, Japan	
国籍		Citizenship	
		Japan	
私書箱		Post Office Address	
		c/o FUJITSU LIMITED 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan	

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)